


P:\01998.00\4000\_FIN\_DES\_257\CADD\40\_HWA\BAPTIST\MT-5\_BDR(REV 1-31).DWG  
Nathan Crevier 2/9/2018 12:10 PM

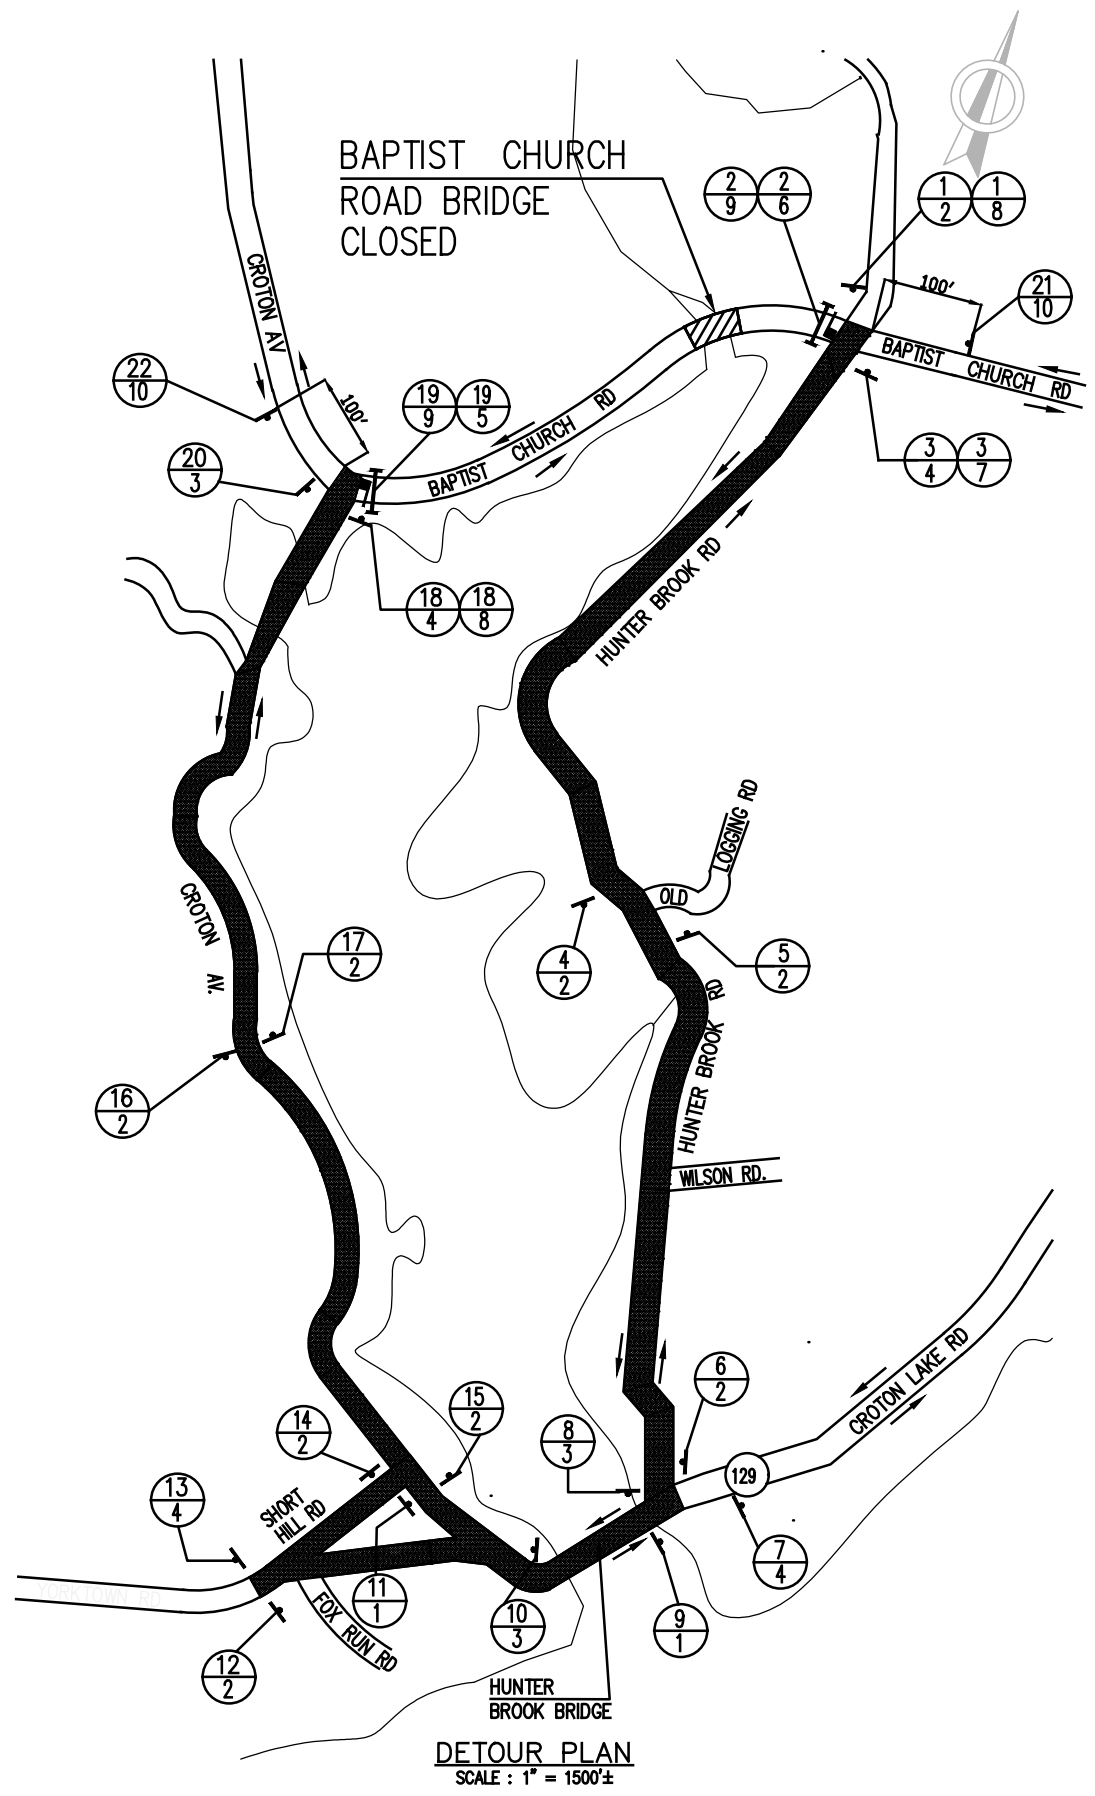

**TEMPORARY SIGN DATA**

ITEM NO.	LOCATION	TEXT NO.	TEXT	LETTER		SIZE	M.U.T.C.D.	COLOR		TYPE OF MOUNTING
				SIZE	TYPE			BACK-GROUND	CHARACTERS	
619.0201M	9,11	①	DETOUR ←	5"	D	30 X 24	G11 - 6C	ORANGE	BLACK	Gr. Mtd.
619.0201M	1,4,5,6 12,13,14 15,16,17	②	DETOUR ↑	5"	D	30 X 24	G11 - 6C	ORANGE	BLACK	Gr. Mtd.
619.0201M	8,10,20	③	DETOUR →	5"	D	30 X 24	G11 - 6C	ORANGE	BLACK	Gr. Mtd.
619.0201M	3,7,13,18	④	END DETOUR	5"	D	30 X 24	G11 - 6C	ORANGE	BLACK	Gr. Mtd.
619.0201M	19	⑤	DETOUR →	6"	D	48 X 18	G11 - 5C	ORANGE	BLACK	TYPE III
619.0201M	2	⑥	← DETOUR	6"	D	48 X 18	G11 - 4C	ORANGE	BLACK	TYPE III
619.0201M	3	⑦		SYMBOL		30 X 30	R3-1C	WHITE	BLACK AND RED	Gr. Mtd.
619.0201M	18	⑧		SYMBOL		30 X 30	R3-2C	WHITE	BLACK AND RED	Gr. Mtd.
619.0201M	2,19	⑨	ROAD CLOSED	6"	D	48 X 30	R11-2C	WHITE	BLACK	TYPE III
619.0201M	21,22	⑩		SYMBOL		36 X 36	W20-7	ORANGE	BLACK	Gr. Mtd.

**NOTES:**

- FOR MAINTENANCE AND PROTECTION OF TRAFFIC NOTES SEE DRAWINGS MT-1 AND MT-2.
- THE CONTRACTOR SHALL PROVIDE ACCESS FOR NYCDEP PERSONNEL, THE RESIDENT ENGINEER, HIS WORKERS AND DELIVERIES OR AS ORDERED BY THE RESIDENT ENGINEER THROUGH THE TEMPORARY CONCRETE BARRIERS. THE CONCRETE BARRIERS SHALL BE PLACED ACROSS THE ROADWAY AT THE END OF EACH WORK DAY AND MAY BE REMOVED AT THE START OF THE NEXT WORK DAY AS REQUIRED. PAID FOR UNDER ITEM 619.0101M.
- DETOUR LENGTH: 3 MILES DETOUR TIME: 6-7 MINUTES

**LEGEND**

SYMBOL	DESCRIPTION	ITEM NO.
	GROUND MOUNTED CONSTRUCTION SIGNS	619.02XXM
	TYPE III CONSTRUCTION BARRICADES	619.0413M
	FLAGGER	--
Gr. Mtd.	GROUND MOUNTED	
	LOCATION TEXT	